


3. WHEN APPLICABLE, IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROTECT EXISTING TREES TO REMAIN. NO HEAVY EQUIPMENT SHOULD BE PERMITTED TO OPERATE OR BE STORED, NOR ANY MATERIALS TO BE HANDLED OR STORED, WITHIN THE DRILPINES OF TREES OUTSIDE THE LIMIT OF GRADING.
2. THE QUANTITIES INDICATED ON THE PLANT LIST AND PLAN ARE PROVIDED FOR THE BENEFIT OF THE CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR HIS OWN QUANTITY CALCULATIONS AND THE LIABILITY WHICH PERTAINS TO THOSE QUANTITIES AND TO ANY RELATED CONTRACT DOCUMENTS AND/OR PRICE QUOTATIONS. QUESTIONS SHOULD BE DIRECTED TO THE LANDSCAPE ARCHITECT.
3. ALL PLANT MATERIALS SHALL BE NURSERY GROWN, GRADE "A" QUALITY, UNLESS OTHERWISE NOTED AND SHALL COMPLY WITH THE AMERICAN STANDARD FOR NURSERY STOCK: ANSI Z-60.1; LATEST EDITION, FOR SIZE AND QUALITY.
4. NO SUBSTITUTIONS AS TO TYPE, SIZE, OR SPACING OF PLANT MATERIALS SPECIFIED ON THIS PLAN MAY BE MADE WITHOUT THE APPROVAL OF THE LANDSCAPE ARCHITECT. KITA SUSTAINABLE DESIGNS, LLC (615) 469-1222.
5. THE CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING UTILITIES AND TO PROTECT UTILITIES THAT ARE TO REMAIN. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE ACCORDING TO LOCAL STANDARDS AT THE CONTRACTOR'S EXPENSE. COORDINATE ALL CONSTRUCTION WITH THE APPROPRIATE UTILITY COMPANY.
6. STABILIZE ALL DISTURBED AREAS WITH SOD. PRIOR TO INSTALLATION, CONTRACTOR TO COORDINATE WITH PANDA EXPRESS PROJECT MANAGER TO VERIFY SOD TYPE TO BE USED. ROLL ALL SOD AFTER PLACING.
7. SOIL USED FOR PLANTING SHALL CONSIST OF (5) PARTS TOPSOIL AND (2) PARTS ORGANIC MATTER, MIXED WITH 1 POUND OF FERTILIZER PER CUBIC YARD.
A. ORGANIC MATTER SHALL BE PEAT MOSS, OR WELL COMPOSTED PINE BARK, OR APPROVED EQUAL AND SHALL BE FINELY GROUND AND FREE OF WEEDS
B. ALL FERTILIZER SHALL BE ORGANIC, SLOW RELEASE FERTILIZER WITH MINOR ELEMENTS.
8. PRE-EMERGENT HERBICIDE SHALL BE APPLIED TO ALL PLANT BEDS AND SOD AREAS PRIOR TO INSTALLATION. TREFLAN OR AN APPROVED EQUAL SHALL BE USED.
9. ALL PLANT BEDS SHALL HAVE ROCK MULCH, BUFFALO RIVER ROCK OR APPROVED EQUAL. 1" - 3" ROCK SIZE AND 3 DEEP. ROCK MULCH SHALL BE CONTAINED BY 4" HIGH, BROWN, POWDER COATED, METAL EDGING.
10. IT IS THE LANDSCAPE CONTRACTOR'S RESPONSIBILITY TO CONFIRM MATERIAL QUANTITIES. IN THE EVENT OF A DISCREPANCY, THE QUANTITIES SHOWN ON THE PLAN SHALL TAKE PRECEDENCE OVER QUANTITIES SHOWN ON THE PLANT LIST.
11. PRIOR TO FINAL PAYMENT, THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE OWNER WITH COMPLETE WRITTEN INSTRUCTIONS ON PROPER CARE OF ALL SPECIFIED PLANT MATERIALS. 'KARL FOR GRAS
12. THE LANDSCAPE INSTALLATION SHALL BE COORDINATED WITH THE IRRIGATION INSTALLATION WHEN APPLICABLE. IRRIGATION TO BE DESIGN-BUILD BY THE G.C.
13. THE LANDSCAPE CONTRACTOR SHALL MAINTAIN POSITIVE DRAINAGE AWAY FROM STRUCTURES AND TAKE SPECIAL CARE TO INSURE THAT BED PREPARATION DOES NOT INHIBIT DRAINAGE.
14. ALL LAWN AREAS SHALL BE CULTIVATED TO A DEPTH OF 4" PRIOR TO SODDING. PREPARED TURF BEDS SHALL BE FREE FROM STONES OVER 2" DIAMETER, WEEDS AND OTHER DELETERIOUS MATERIAL.
15. THE LANDSCAPE CONTRACTOR SHALL RAKE SMOOTH ALL SOD AREAS PRIOR TO INSTALLATION.
16. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BACKFILLING BEHIND THE CURB SO GRADE IS LEVEL WITH TOP OF CURB.
17. CUT AWAY ROPES OR WIRES FROM B&B PLANTS. PULL BACK BURLAP FROM TOP OF ROOT BALL. DO NOT ALLOW BURLAP TO BE EXPOSED AT SURFACE. TOTALLY REMOVE BURLAP IF IT IS SYNTHETIC.
18. IF CONTAINER GROWN PLANTS SHOW SIGNS OF BEING ROOT BOUND, SCORE ROOTS VERTICALLY.
19. ALL PLANT MATERIAL SHALL BE GUARANTEED FOR ONE YEAR FROM DATE OF FINAL ACCEPTANCE.
20. ALL REPLACEMENTS SHALL BE OF THE SAME TYPE, SIZE, AND QUALITY AS SPECIFIED ON THE PLANT LIST, UNLESS APPROVED OTHERWISE IN WRITING BY THE LANDSCAPE ARCHITECT.
21. ANY MATERIAL THAT IS DEEMED TO BE 25% DEAD OR MORE SHALL BE CONSIDERED DEAD, AND MUST BE REPLACED AT NO CHARGE. A TREE IS CONSIDERED DEAD WHEN THE MAIN LEADER HAS DIED BACK, OR MORE THAN 25% OF THE CROWN IS DEAD.
22. REPLACEMENTS SHALL BE MADE DURING THE NEXT PLANTING SEASON UNLESS THE LANDSCAPE CONTRACTOR AGREES TO AN EARLIER DATE.
PLANTING DATES
SPRING: MARCH 15 - APRIL 15
FALL: OCTOBER 1 - NOVEMBER 30
23. THE LANDSCAPE CONTRACTOR WILL NOT BE RESPONSIBLE FOR PLANT MATERIAL THAT HAS BEEN DAMAGED BY VANDALISM, FIRE, RELOCATION, WILDFIRE, THEFT, OR OTHER ACTIVITIES BEYOND THE LANDSCAPE CONTRACTOR'S CONTROL.
24. GENERAL CONTRACTOR TO COORDINATE AND BE RESPONSIBLE FOR WATERING ALL PLANTS AND TURF AREAS AFTER PLANTING UNTIL IRRIGATION SYSTEM IS OPERABLE.
25. CONTRACTOR TO IRRIGATE ALL NEW LANDSCAPE PLANTINGS AND LAWN AREAS WITH AN AUTOMATED UNDERGROUND IRRIGATION SYSTEM. IRRIGATION SYSTEM TO BE DESIGN-BUILD BY G.C.
26. IRRIGATION TO HAVE A SEPARATE METER.
27. PLANT MATERIAL SHALL BE APPROPRIATE FOR THE APPLICABLE USDA PLANT HARDINESS ZONE.
28. SPECIES MUST MEET BOTH MINIMUM CALIPER OR GALLON SIZE AND HEIGHT IF LISTED.
29. LANDSCAPE CONTRACTOR TO MAINTAIN LANDSCAPING FOR 60 DAYS AFTER TURNOVER. MAINTENANCE SHALL INCLUDE MOWING, EDGING AND TRIMMING SHRUBS
30. ALL SHRUBS AND TREES LOCATED ALONG AREAS WITH PARKING SPACES MUST BE SETBACK A MINIMUM OF 2' FROM THE CURB.

va811.com
Dig With CARE



1. ALL LANDSCAPE BEDS SHOULD BE PREPARED 3" BELOW GRADE PRIOR TO START.
2. APPLY PRE-EMERGENT TO ALL LANDSCAPE BEDS AS SUGGESTED PER MANUFACTURER'S SPECIFICATIONS. (SEE NOTE #8).
3. APPLY PERMEABLE WEED BARRIER TO ALL LANDSCAPE BEDS.
4. ALL PLANT BEDS SHALL HAVE ROCK MULCH, BUFFALO RIVER ROCK OR APPROVED EQUAL. 1' - 3' ROCK SIZE AND 3" DEEP. INSTALL OVER WEED BARRIER.

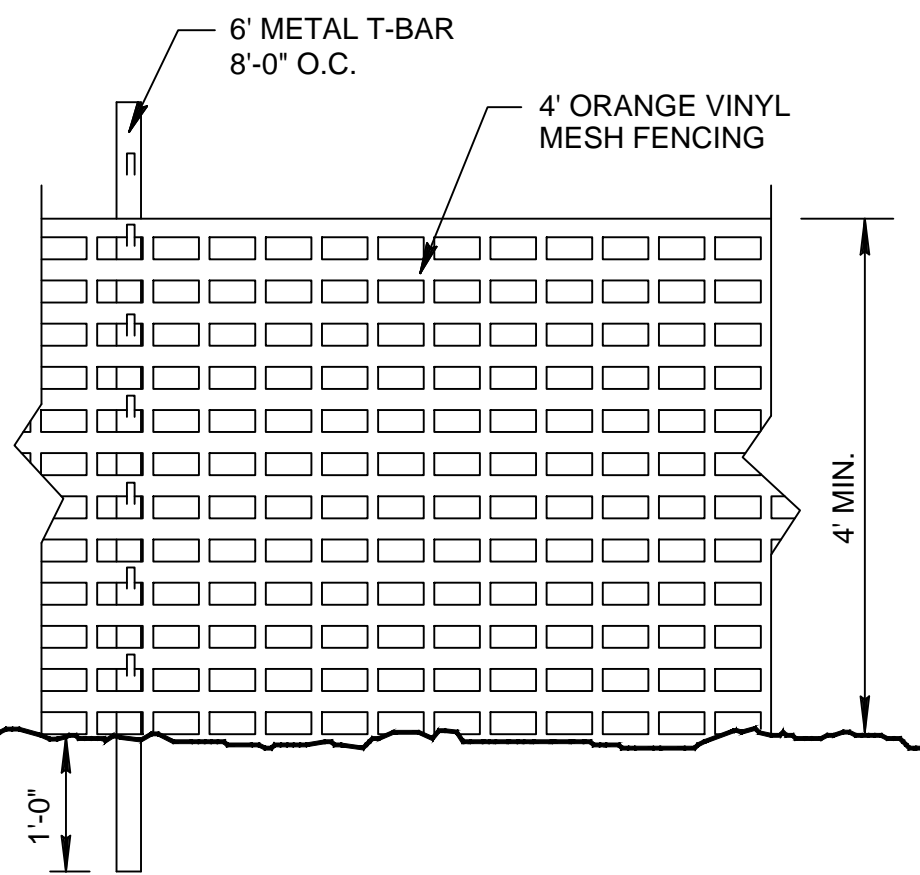

NOTE: FENCING TO EXTEND TO DRIPLINE OF TREE(S).

N.T.S.

